


GUMO LG

GRANULATE PAD

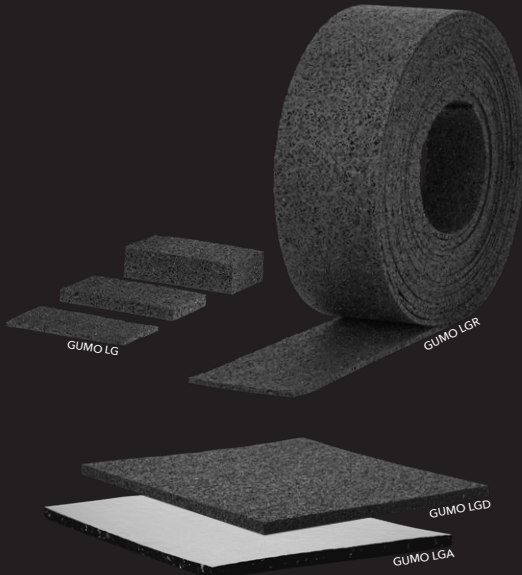


The **GUMO LG** pads can be used to compensate for small differences in height of between 3 mm and 20 mm between the substructure and the substrate.

GUMO LGR rubber granulate rolls are practical and perfect for cutting to length. GUMO LGR 3 makes it easy to lay stone or ceramic tiles on aluminium substructures. The granulate underlay provides shock-absorbing and anti-slip properties.

GUMO LGD / LGA mats are used as pressure distribution pads under the pedestals. GUMO LGA has an additional aluminium foil on one side. This acts as a barrier to the waterproofing membranes and prevents potential plasticiser contamination.

Use the aluminium foil side for membrane side

GUMO LGA

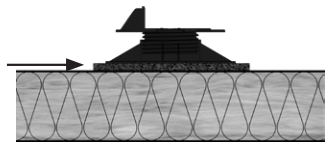

GUMO LG pads		
Description	PU	Prod. No.
3 mm	75 PCS	011303000
3 mm	1.000 PCS	011313000
8 mm	50 PCS	010704000
8 mm	400 PCS	010713000
20 mm	25 PCS	011404000
20 mm	280 PCS	011413000

GUMO LGR rubber granulate		
Description	PU	Prod. No.
3 mm - 7 m	1 ROL	012205000
3 mm - 28 m	2 ROL	012213000
8 mm - 3 m	1 ROL	012105000
8 mm - 12 m	2 ROL	012113000

GUMO LGD mats		
Description	PU	Prod. No.
8 mm *	10 PCS	009301001
8 mm	68 PCS	009313000

GUMO LGA mats		
Description	PU	Prod. No.
8 mm *	10 PCS	012001001
8 mm	68 PCS	012013000

* no branding possible

DOWNLOADS



Data sheet



Tips & Tricks



BRANDING
Custom branding upon request

OVERVIEW	GUMO LG3	GUMO LG 8	GUMO LG 20	GUMO LGR 3 Roll	GUMO LGR 8 Roll	GUMO LGD	GUMO LGA
Dimensions:	H 3 mm W 40xL 80 mm	H 8 mm W 40xL 80 mm	H 20 mm W 40xL 80 mm	H 3 mm W 68 mm L 7 m or 28 m	H 8 mm W 68 mm L 3 m or 12 m	H 8 mm W 185xL 200 mm	H 8 mm W 185xL 200 mm
Material:	EPDM granulate Recycled black UV and weather resistant						with aluminium foil on one side