


SUPRO H

DECKING CONNECTOR

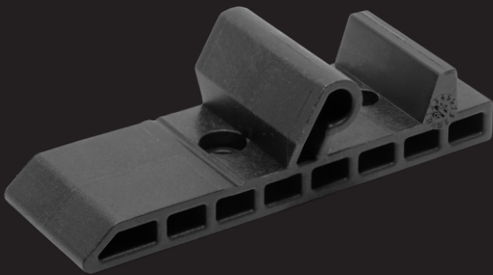

The concealed **SUPRO H** decking connector ensures simple, fast and secure installation of SUPRO profiled decking boards.

The innovative SUPRO decking profile conceals the fastening system, provides a pleasing appearance, and offers perfect structural protection.

The interlocking system allows quick positioning of the connector to the board. The UNIA 4.2 x 17 mm screw on the underside provides additional support and secures the boards lengthwise.

The fastening system is characterized by a sliding and fixed-point installation method: Natural swelling and shrinking movements are optimally controlled and regulated.

Freely selectable joint spacing adapted to the board width and its characteristics allows for the perfect decking appearance and design.

Concealed fixing for the first and last row of boards is built into the connector as standard.

The substructure can be made of wood, wood-like materials or materials or aluminium.

OVERVIEW

Dimensions:	Length 62 mm Width 24 mm Height 6 mm Freely selectable joint spacing
Material:	PA6 50GF Composite material, black UV and weather resistant UNIA System screw hardened stainless steel
Fastening type:	Concealed Sliding point fixation
Decking profile:	Native and modified wood species with SUPRO H profiled decking boards Thickness 19-32 mm

SUPRO H

PU	Prod. No.
200 PCS	011511000
800 PCS	011513000





BRANDING
Custom branding
upon request



SET-PACK

Each packaging contains the UNIA1 system screws 4.2 x 17 mm and 4.2 x 28 mm required for installation, 1 pc. HELPO assembly aid, 1 pc HELPO Bit TX20 and assembly instructions



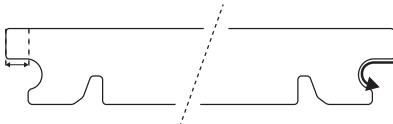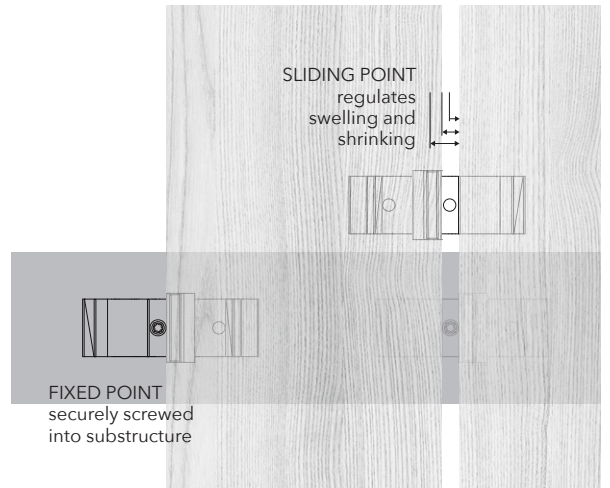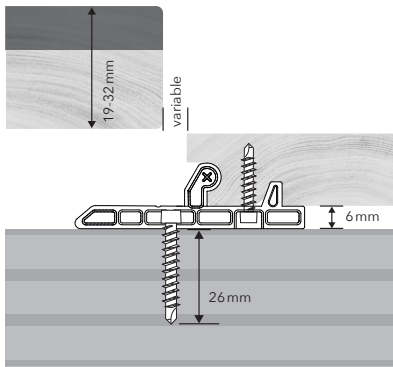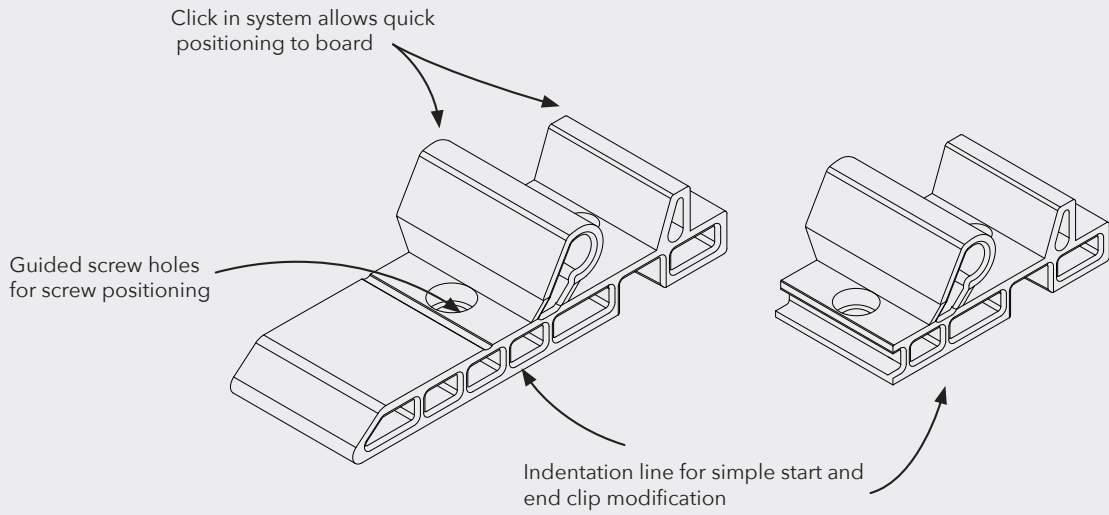


Canopy effect - protects groove and connector engagement

Optimal water drainage - prevents dirt accumulation



SUPRO-Profile

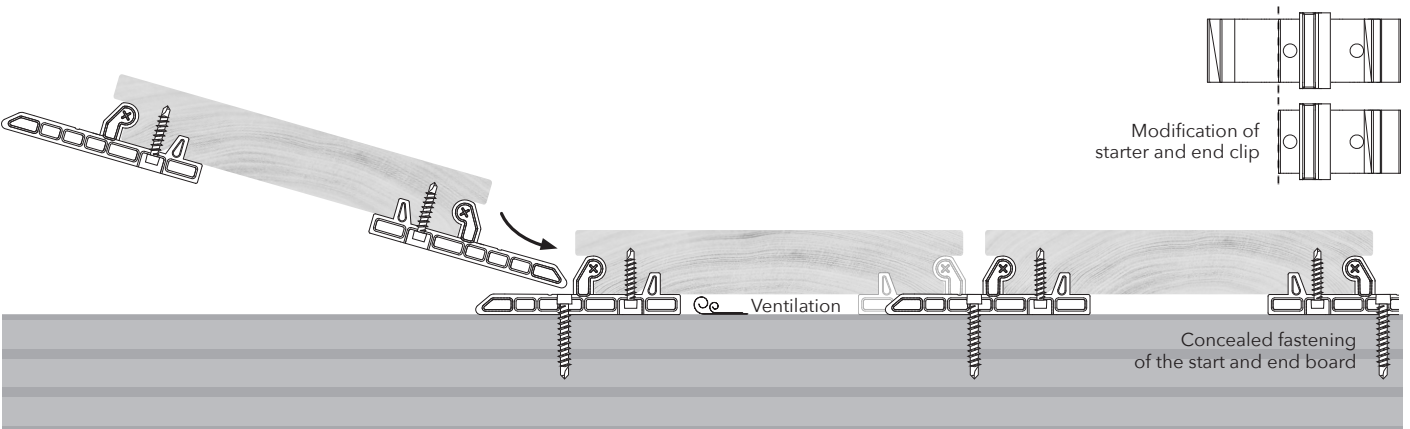

DOWNLOADS



Installation



Board exchange



Data sheet



Tips & Tricks



Video